



THE 880F4 SERIES




880F4 A GREAT SAW WITH A BAD ATTITUDE

The new 880F4 cutting system offers the superior strength of FORCE4® technology in a package that meets industry standards of design and ergonomics. Built for the hardcore cutter, this sleek powerhouse is packed with features designed to make it the hardest working saw ICS® has ever made.

SAW SELECTION

In addition to cutting depth and power requirements, estimated frequency of use is important when selecting a saw. Use the chart below to determine the right saw for your cutting needs.

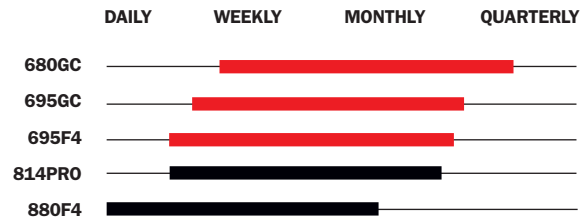

880F4 PRODUCT SPECIFICATIONS - 8 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	6100 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	122 in-lbs (13.8 Nm)
HORSEPOWER	11.5 hp (8.6 kW)
HYDRAULIC SUPPLY	8 gpm (30 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	98 dB @ 3 ft (1 m) (Sound pressure level) 107 dB @ 3 ft (1m) (Sound power level)
VIBRATION LEVEL	2.0 m/second ² (front handle) 6.0 m/second ² (rear handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

· Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.

880F4 PRODUCT SPECIFICATIONS - 12 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	6500 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	170 in-lbs (19.2 Nm)
HORSEPOWER	17.5 hp (13 kW)
HYDRAULIC SUPPLY	12 gpm (45 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	98 dB @ 3 ft (1 m) (Sound pressure level) 107 dB @ 3ft (1 m) (Sound power level)
VIBRATION LEVEL	2.0 m/second ² (front handle) 6.0 m/second ² (rear handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

· Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.



icsbestway.com

ICS | Blount Inc. • 4909 SE International Way Portland, OR 97222 USA • Ph 800.321.1240 • Fax 503.653.4393

Copyright 2012 ICS | Blount Inc. Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS. 0112