

DA7000 SERIES



**Dependable and Efficient
Jobsite Power**




The DA7000-Series delivers reliable power in a compact sound attenuated package. Its size makes it ideal for construction, standby or industrial applications.

STANDARD FEATURES

- **AC Output** – 7kW maximum, 6kW continuous
- **Sound-attenuated package** – Reduces jobsite noise for added safety
- **Control Panel** – Ease of access and durable to withstand the toughest jobs
- **Brushless alternator design** – Reduces maintenance while still providing years of dependable service
- **Full-panel GFCI protection** – Compliant with OSHA and NEC regulations
- **Full power switch** – Provides the operator with balanced output under changing loads
- **Hour meter** – Allows accurate tracking of usage and maintenance intervals
- **Engine** – Dependable Tier 4 Final Kubota Diesel that meets all current EPA requirements



Model: DA7000SSA2
Shown with optional trailer mount

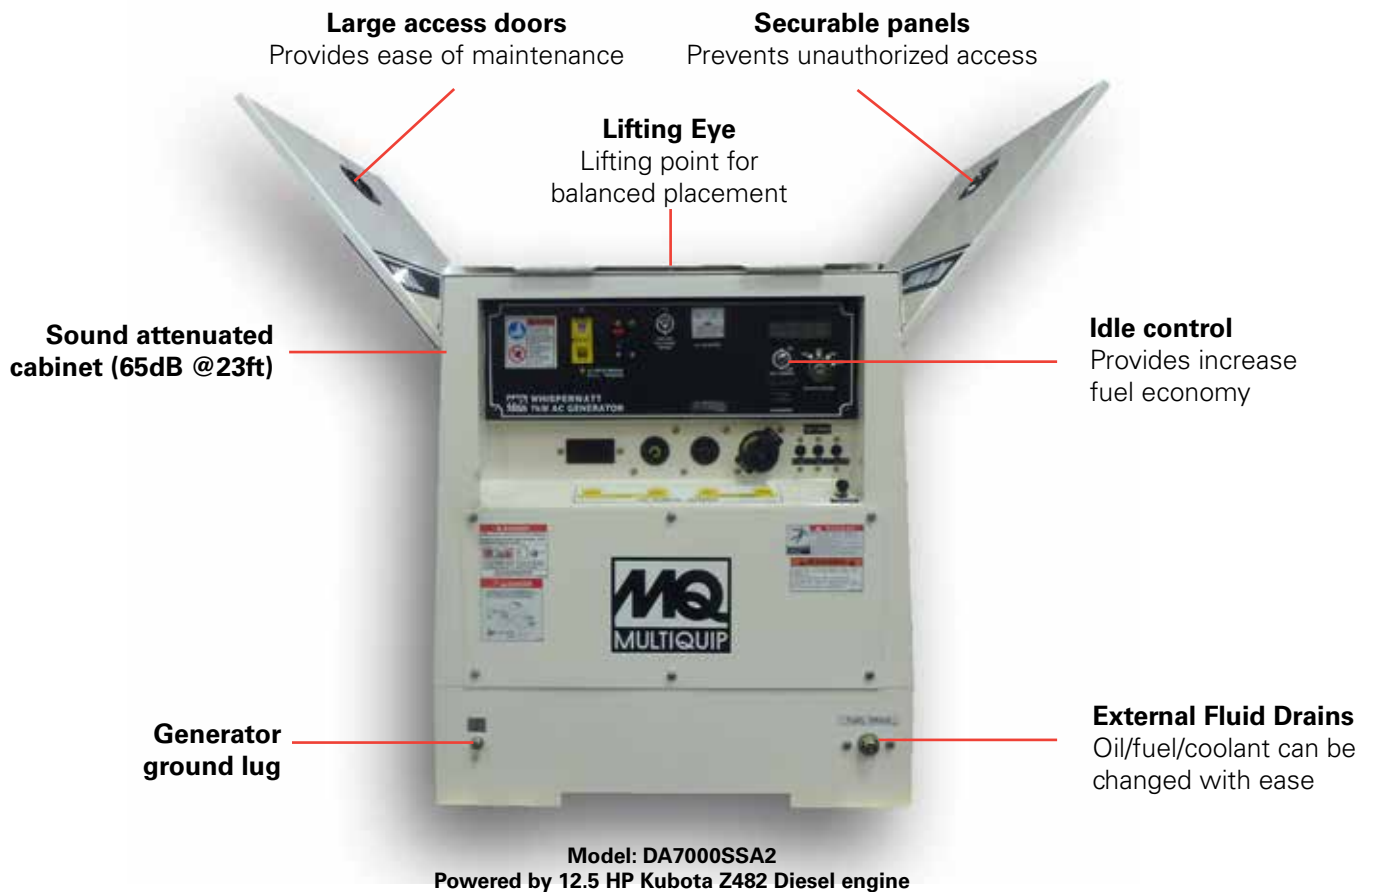

The practical solution for permanent generator installation.

Single side service access is standard in the model DA7000SSA2GH. A factory modification relocates the oil-filter assembly and enables all service points (fuel filter, oil filter, battery, coolant, air filter and drains) to be accessed from the same side of the generator. It is recommended for applications where the generator will be permanently mounted on equipment or installed in an area with obstructed access to the cabinet.



Model: DA7000SSA2GH
Modified for single side serviceability

A variety of options and accessories are available to customize the DA7000-Series to fit your application requirements.

- **Electronic Control Unit** – Provides the ability to automatically start/stop with the use of an automatic transfer switch
- **Positive Air Shutdown** – For jobsites where natural gas could become present, this kit senses the increased airflow and shuts down to prevent engine runaway
- **Ignition Dropout** – Cuts output from battery when loss of ignition occurs. Recommended for unattended applications
- **Water Heater** – Keeps radiant heat within the coolant system for ease of startup in colder climates
- **Battery Tender** – Provides charge to battery in extended down periods. Requires external 120V input
- **Transport** – Choose either highway trailer or rugged wheel kit for job site mobility

FULL FEATURED CONTROL PANEL

This securable control panel enables you to efficiently operate your job site

A variety of duplex and twist lock receptacles provides the ability to distribute power to equipment and junction boxes. Individual circuit breakers enable you to control output to individual tools and prevent disruption in critical work areas.



Specifications

MODEL	DA7000SSA2 / DA7000SSA2GH
Alternator Design	Brushless
Maximum Watts	7,000
Continuous Watts	6,000
Voltage	120/240V
Max. Amp @ 120V	58
Cont. Amp @ 120V	50
Max. Amp @ 240V	29
Cont. Amp @ 240V	25
Frequency/Phase	60 HZ Single Phase
Voltmeter	Standard
Full Power Switch	Standard

RECEPTACLES

5-20R 125V 20A	1
L5-30R 125V; T-Lock 30A	1
L14-30R 120/240V; T-Lock 30A	1
CS-6369; 120/240V 50A	1

ENGINE

Engine Manufacture	Kubota Diesel	
Engine Model	Z482	
Emissions	EPA Tier 4 Final Certified	
Horsepower (KW)	12.5 (9.3)	
Rated Speed - RPM	3,600	
Low Oil Shutdown	Standard	
Starting Systems	Electric	
Fuel Capacity - gal (ltr)	6.6 (25)	
Running Time @ full load - hr./tank	10	
Oil Capacity	.66 gal (2.5 ltr)	
Coolant Capacity	.74 gal (2.8 ltr)	
Fuel Gauge	Standard	
Automatic Idle Control	Standard	
Single Side Filter Access	N/A	Standard
Sound Level dB @ 23 ft.	65	

DIMENSIONS AND WEIGHTS

Length - in. (cm)	44.9 in. (114 cm)	
Width - in. (cm)	25.6 in. (65 cm)	
Height - in. (cm)	31.3 in. (79.5 cm)	
Approx. Dry Weight - lbs. (kg)	527 Lbs (239 kg)	
Approx. Wet Weight - lbs. (kg)	582 Lbs (264 kg)	

OPTIONS	DA7000SSA2 / DA7000SSA2GH	
Auto Start Option	MQPECUDA7KIT	
Emergency Stop	EE55889	
Ignition Dropout	EE58210	
Positive Air Shutdown	EE57755	
Fuel/Water Separator	49871	
Water Heater	MQPHEATDAKIT	
Battery Tender	MQPBCDAKIT	
In-Line fuel heater	MQPILHEATERKIT	
Single side Filter access	DA7000GHKIT	n/a
Wheel Kit	WKT225A	
Trailer	TRLR10W	

* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

Your Multiquip dealer is:

Connect with us



All features and specifications are subject to change without notice.
Version (1114DW)



WWW.MULTIQUIP.COM
800.421.1244