



THE 880F4-FL SERIES




880F4-FL MAKES FLUSH CUTS FAST AND SIMPLE.

When you're in a tight spot, choose the 880F4-FL. The unique flush-cut design of these saws allows them to cut within 3/16 inches (4.8 mm) from walls or floors, bringing the precision of Diamond Chain Technology™ to a new level. Available in both 8 and 12 gpm (30 and 45 lpm) models.

SAW SELECTION

In addition to cutting depth and power requirements, estimated frequency of use is important when selecting a saw. Use the chart below to determine the right saw for your cutting needs.

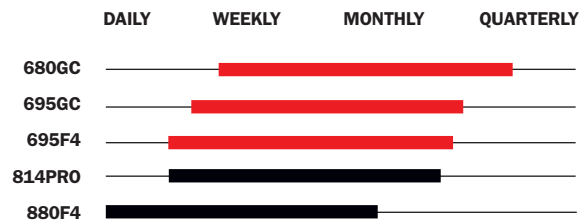

880F4-FL PRODUCT SPECIFICATIONS - 8 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	6100 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	122 in-lbs (13.8 Nm)
HORSEPOWER	11.5 hp (8.6 kW)
HYDRAULIC SUPPLY	8 gpm (30 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	98 dB @ 3 ft (1 m) (Sound pressure level) 107 dB @ 3 ft (1m) (Sound power level)
VIBRATION LEVEL	2.0 m/second ² (front handle) 6.0 m/second ² (rear handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

• Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.

880F4-FL PRODUCT SPECIFICATIONS - 12 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	6500 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	170 in-lbs (19.2 Nm)
HORSEPOWER	17.5 hp (13 kW)
HYDRAULIC SUPPLY	12 gpm (45 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	98 dB @ 3 ft (1 m) (Sound pressure level) 107 dB @ 3ft (1 m) (Sound power level)
VIBRATION LEVEL	2.0 m/second ² (front handle) 6.0 m/second ² (rear handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

• Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.



icsbestway.com

ICS | Blount Inc. • 4909 SE International Way Portland, OR 97222 USA • Ph 800.321.1240 • Fax 503.653.4393

Copyright 2012 ICS | Blount Inc. Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS. 0112