

LSC • LSR - GROUND DRAINAGE PUMP

LSC DRAINAGE PUMP: Original residue dewatering pump; able to pump down to the floor, even the smallest puddle can be pumped dry. LSC drainage pump is the best for complete drainage of flat surfaces where a sump is not available.


LSR DRAINAGE PUMP: Pump holds suction for drainage to 0.4 inch water level.



LSC1.4S



LSR2.4S

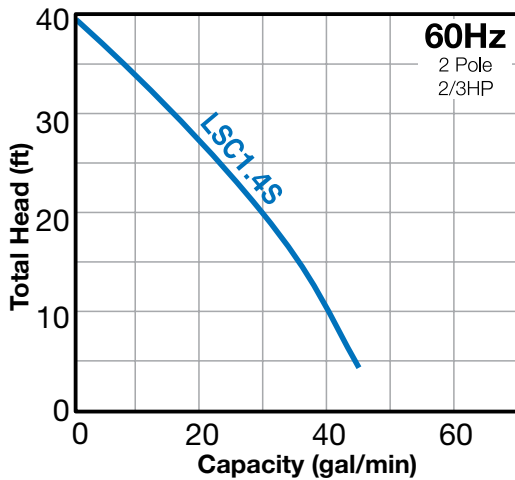


LSC1.4S Features

- Prime pump through discharge outlet for start up at any water level
- Internal check valve holds prime and prohibits back flow through pump when stopped
- Urethane, Semi Vortex Impeller and Wear Plates for maximum durability and maintaining pump performance
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces (Patented)
- V-Ring Seal protects mechanical seal from abrasive particles

Optional Accessories - See page 28-31

- SLS-LSC20 Automatic operation surface level switch
- 2" Discharge
- Discharge hoses
- Quick connect fittings

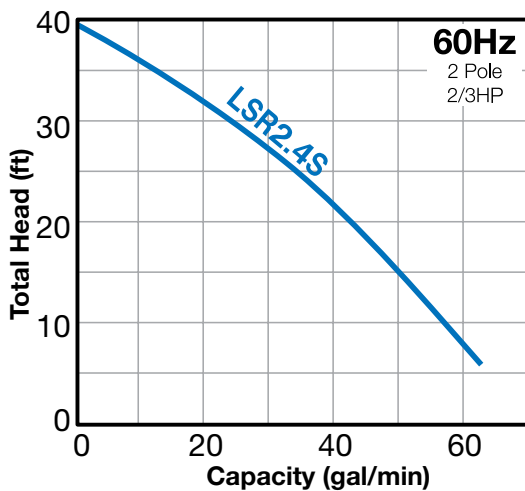

LSR2.4S Features

- Urethane, Semi Vortex Impeller and Wear Plates for maximum durability and maintaining pump performance
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces (Patented)
- V-Ring Seal protects mechanical seal from abrasive particles

Optional Accessories - See page 28-31

- SLS-LSR32 Automatic operation surface level switch
- Discharge hoses
- Quick connect fittings

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
LSC1.4S	2/3	Single	3/4	20	7 11/16	12 7/16	0.04	31

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
LSR2.4S	2/3	Single	2	32	8 1/4	11 3/8	0.2	30