


MILWAUKEE® & CORE BORE® MOUNTED MOTORS

16" Bit Capacity



16" Bit Capacity

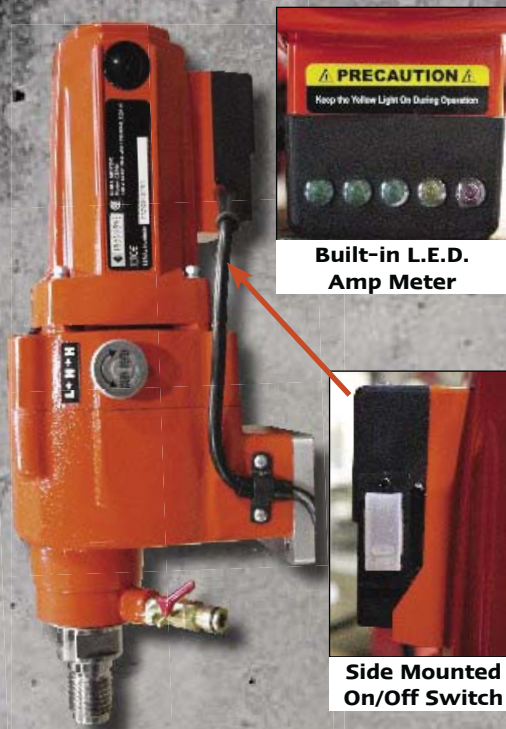

18" Bit Capacity



Milwaukee® Electric

- Model 4004**-(4.8 max HP) Max Bit Size: 16"
- Model 4005**-(4.8 max HP) Max Bit Size: 7"
- Model 4096**-(4.8 max HP) Max Bit Size: 10"
- Model 4097-20** (2.5 max HP) Max Bit Size: 12"
 - 20 amp, 115 volt (4097 = 15 amp/120V)
 - Available with or without on/off switch
 - Built-in water swivel and water control valve
 - 1.250"-7 threaded spindle
 - Slip clutch
 - Includes open end wrench

MILWAUKEE MOTORS HAVE A 5-YEAR LIMITED WARRANTY

Core Bore® CB700 Electric

- 20 amp, 120 volt or 230 volt
- Up to 16" bit capacity
- Built-in thermal overload protection
- Water connection for wet drilling
- Includes on/off switch/amp meter
- 1.250"-7 threaded spindle

CB700 & CB744 HAVE A 1-YEAR WARRANTY

Core Bore® CB744 Electric

- 25 amp, 115 volt
- Up to 18" bit capacity
- Built-in LED amp meter - **no control panel needed**
- Water hose connection
- 1.250"-7 threaded spindle
- Slip clutch
- Bubble level
- Carrying handle
- Extra long cord
- Includes open end wrench

Milwaukee® & CORE BORE® ELECTRIC DRILL MOTORS									
Motor Make/Model	AMP	Loaded RPM	Part # without on/off switch	Cat # without on/off switch	List Price	Part # with on/off switch	Cat # with on/off switch	Product Weight (lbs)	List Price
Milwaukee Model 4004	20	300/600	4244032	01750	\$1,797	4244033	01751	24	\$1,899
Milwaukee Model 4096	20	450/900	4244038	01754	1,797	4244039	01755	24	1,899
Milwaukee Model 4005	20	600/1200	4244042	01758	1,797	4244043	01760	24	1,899
Milwaukee Model 4097-20	15	500/1000	4244030	01748	1,713	4244031	01749	26	1,818
Core Bore® CB700	20	210/480	---	---	---	4244116	30062	40	1,353
Core Bore® CB700	20	210/480	---	---	---	4244122	52884	40	1,471
Core Bore® CB744	25	225/300/565/780	---	---	---	4244125	78699	27.06	2,108

16" Bit Capacity



18" Bit Capacity



18" Bit Capacity



SR38-18 Speed-RPM Ranges

Number of Motor Steps: 6

Number of Mechanical Gears 3

Electric Speed Step #	Mechanical Gear 1	Mechanical Gear 2	Mechanical Gear 3
1	445	880	1370
2	380	755	1180
3	320	630	980
4	260	520	810
5	220	430	670
6	180	360	560

Weka® DK22

Electric

- Heavy duty
- Water connection
- 1.250"-7 threaded spindle
- Recommended for bits up 1"-12" Max 16"

Weka® DK32

Electric

- Heavy duty
- Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 2"-16" Max 18"

Weka® DK38

Electric

- 18 speeds
- Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 1-1/2"-16" Max 18"

WEKA ELECTRIC DRILL MOTORS

Motor/Model #	AMP	No Load RPM	Loaded RPM	Part #	Cat #	Product Weight (lbs.)	List Price
WEKA DK22	23 (110V)	550/1120/1680	300/640/960	4244018	01741	31	\$2,922
WEKA DK22	11 (230V)	550/1120/1680	300/640/960	4244016	47069	31	2,922
WEKA DK22L	23 (110V)	460/940/1400	250/520/780	4244105	54872	31	2,942
WEKA DK22S	23 (110V)	800/1640/2430	420/880/1300	4244014	47828	31	2,922
WEKA DK22S	11 (230V)	800/1640/2430	420/880/1300	4244029	47070	31	2,922
WEKA DK22F*	23 (110V)	550/1120/1680	300/640/960	4244118	40586	31	2,942
WEKA DK22F*	11 (230V)	550/1120/1680	300/640/960	4244119	53300	31	2,942
WEKA DK32	30 (110V)	380/800/1200	230/480/720	4244059	46896	31	3,163
WEKA DK32	15 (230V)	380/800/1200	230/480/720	4244058	47071	31	3,163
WEKA DK32F*	30 (110V)	380/800/1200	230/480/720	4244120	56143	31	3,173
WEKA DK32F*	15 (230V)	380/800/1200	230/480/720	4244121	44292	31	3,173
WEKA SR38	16 (230V)	See chart above		4244124	68236	36	4,971

All Weka motors include on/off switch

*F series include special flange adapter for M-5 PRO only (11" maximum bit capacity)

20" Bit Capacity



24" Bit Capacity



26" Bit Capacity



SR75S-15 Speed-RPM Ranges

Electric Speed Step	Mechanical Gear 1 RPM	Mechanical Gear 2 RPM	Mechanical Gear 3 RPM
1	150	290	460
2	130	250	390
3	105	210	330
4	90	175	280
5	75	150	230

Weka® DK42

Electric

- Heavy duty
- Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 3"-18" Max 20"

Weka® DK52

Electric

- Heavy duty
- Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 3"-20" Max 24"

Weka® SR75S

Electric

- 15-Speed-480V, 3 phase-7500 watt
- Water cooled with water protection
- No carbon brushes and rotating windings translate into low maintenance
- 1.250"-7 threaded spindle
- Recommended for bits 5"-24" Max 26"

WEKA ELECTRIC DRILL MOTORS

Motor/Model #	AMP	No Load RPM	Loaded RPM	Part #	Cat #	Product Weight (lbs)	List Price
WEKA DK42	8.2 (460V-3PH)	200/390/620	190/410/610	4244022	01743	48	\$3,725
WEKA DK42	14.2 (230V-3PH)	200/390/620	190/410/610	4244023	01744	48	3,725
WEKA DK42S	8.2 (460V-3PH)	285/560/880	290/610/910	4244027	47641	48	3,725
WEKA DK42S	14.2 (230V-3PH)	285/560/880	290/610/910	4244024	01745	48	3,725
WEKA DK42AL	8.2 (460V-3PH)	170/330/510	130/280/430	4244066	94768	48	3,725
WEKA DK42AL	14.2 (230V-3PH)	170/330/510	130/280/430	4244056	91963	49	3,725
WEKA DK52	9 (460V-3PH)	170/340/520	150/290/440	4244060	47119	56	4,225
WEKA DK52	18 (230V-3PH)	170/340/520	150/290/440	4244061	48023	58	4,225
WEKA SR75S	14 (480V-3PH)	150/290/460 130/250/390 105/210/330	90/180/280	4244117	16537	48.5	5,995

All Weka motors include on/off switch